



Equipment That Dominates



FOR SERIOUS
CULINARY
PROFESSIONALS

It all starts with the ingredients.

We understand the importance of having reliable equipment in your operation. Our job is to provide equipment that puts your mind at ease so you can do what you do best, create!



CULITEK

REFRIGERATION

CULITEK, Commercial
Foodservice Equipment
You Can Count On!

Bottle Coolers Buying Guide

CULITEK
EQUIPMENT THAT DOMINATES

Black coated steel exterior for a sleek appearance



Environmentally Friendly R290 Hydrocarbon Refrigerant




Pre-Programmed Digital Controls



SS Series

INTERIOR CONSTRUCTION	304 stainless steel interior
COOLER FEATURES	Plastic coated steel dividers keep contents organized and within easy reach. Built-in bottle opener, with cap catcher, for swift bottle opening
LIDS	Stainless steel sliding lids provides easy access to beverages. Lids are individually locking, keeping contents safe after hours. Insulated lids keep beverages cold when they are closed
TEMPERATURE RANGE	Digital temperature control ranges 33°F to 41°F
AIR FLOW	Carel temperature controller initiates automatic defrost schedule for worry-free use
AVAILABLE MODELS	1, 2, and 3 Lid Bottle Coolers MBC-25, MBC-50, MBC-65, MBC-95



CULITEK Bottle Coolers

Models: MBC-25, MBC-50, MBC-65, MBC-95



MBC-25



MBC-50

Bottle Coolers

Whether you are serving bottled or canned beverages, flat top bottle coolers from CULITEK maximize storage capacity and keep drinks cold and readily accessible to service guests. Perfect for any size bar, pub, or restaurant that operates in a high volume setting. Plastic coated steel dividers keep beverages organized, while the built-in bottle opener and cap catcher will keep your work space clean and free of debris. ETL Listed and ETL Sanitation, these units are backed with a 2 year warranty on parts and a 5 year warranty on the compressor.

Cooling System

- R290 hydrocarbon refrigerant is an environmentally-responsible choice for your business
- Maintains a temperature range of 33°F to 41°F

Cabinet Construction

- Black coated steel exterior
- Interior constructed of 304 stainless steel
- Insulated cabinet with foamed-in-place, high density cell polyurethane insulation

Electrical Control

- Electric LED display provides a digital display of cabinet temperatures, allowing for easy temperature adjustments
- Carel temperature controller initiates automatic defrost schedule for worry-free use
- 7-foot power cord with NEMA 5-15 plug

Lids

- Stainless steel sliding lids provides easy access to beverages
- Lids are individually locking, keeping contents safe after hours
- Insulated lids keep beverages cold when they are closed

Model Features

- Built in bottle opener, with cap catcher, keeps floor free of debris and allows for quick service to customers

EQUIPMENT THAT DOMINATES
For Culinary Professionals

STANDARD FEATURES

- Black coated steel exterior for a sleek appearance
- 304 stainless steel interior
- Balanced refrigeration system maintains temperature range of 33°F to 41°F
- Plastic coated steel dividers keep contents organized and within easy reach
- Stainless steel sliding lids for easy access to product
- Built-in bottle opener, with cap catcher, for swift bottle opening
- Foamed-in-place insulation helps provide strength, while helping to maintain internal temperature
- Eco-friendly R290 hydrocarbon refrigerant
- Automatic defrosting



Attention CA Residents PROP 65 WARNING


This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm.

For more information, go to www.P65warnings.ca.gov

MADE IN CHINA



Bottle Coolers Specifications

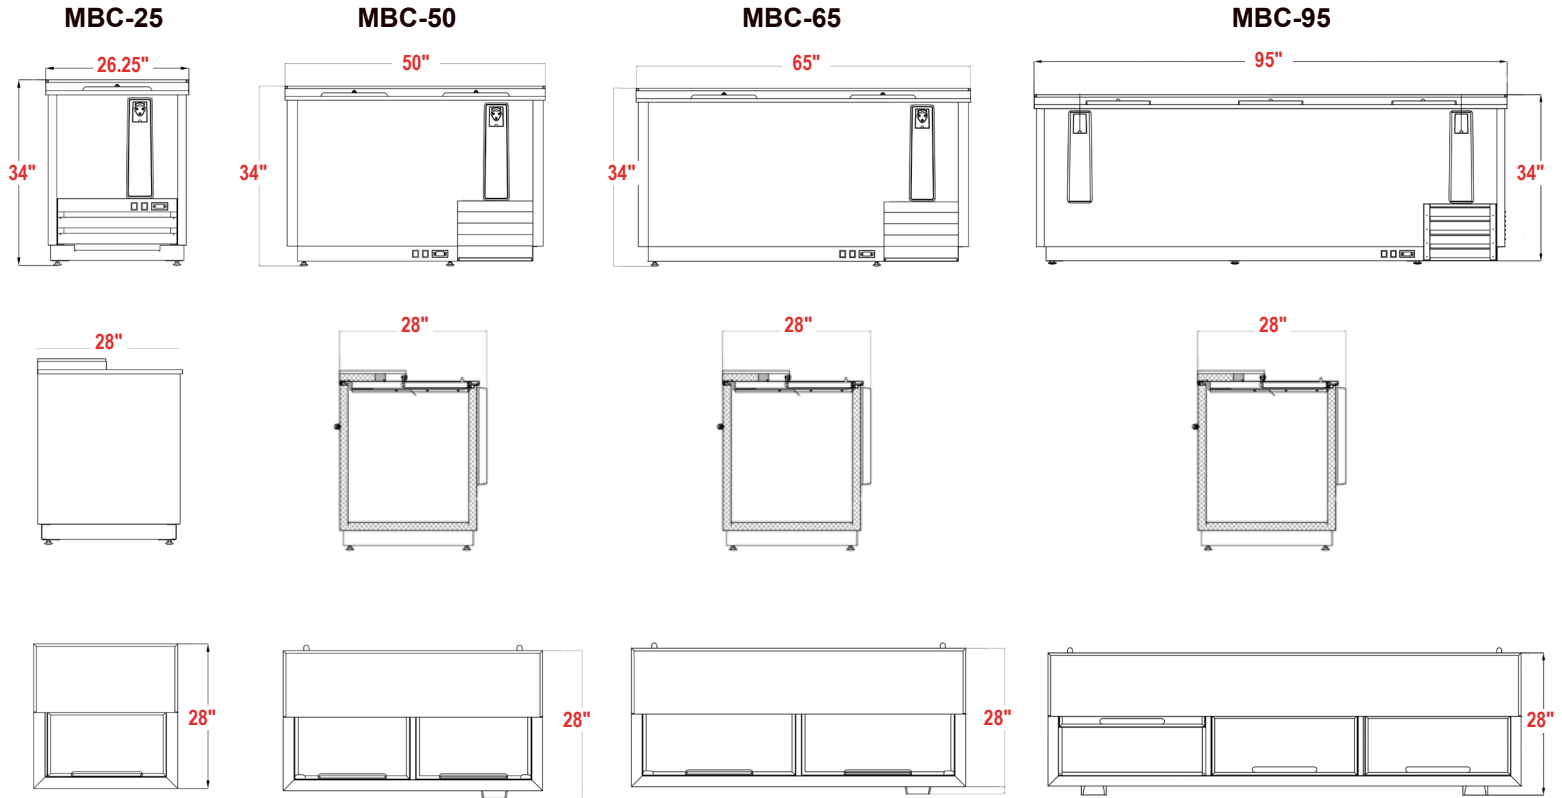

BOTTLE COOLERS

Model Number	MBC-25	MBC-50	MBC-65	MBC95
Lids	1	2	2	3
Dividers	-	3	4	5
Net Volume (Cu. Ft.)	6	13	18	32
Overall Dimensions (in)	26.25"W x 28"D x 34"H	50"W x 28"D x 34"H	65"W x 28"D x 34"H	95"W x 28"D x 34"H
Interior Dimensions (in)	20"W x 26"D x 23"H	45"W x 26"D x 23"H	60"W x 26"D x 23"H	90"W x 26"D x 23"H
Horsepower	1/6	1/6	1/6	1/4
Refrigerant	R290	R290	R290	R290
Voltage/Hertz/Phase	115/60/1	115/60/1	115/60/1	115/60/1
Amps	2.04	2.28	2.60	4.20
Net Weight (lbs)	128	256	306	408
Gross Weight (lbs)	172	300	351	452
Shipping Dimensions (in)	30"W x 31"D x 41"H	55"W x 32.5"D x 41.75"H	71"W x 32.5"D x 41.75"H	100"W x 32.5"D x 41.75"H
Case Cap. (12 oz. Cans)	6	24	32	37
Case Cap. (12 oz. Bottles)	4	16	22	55