CULITEK C HD-Series Reach Ins

Models: R1SS, R2SS, R3SS, F1SS, F2SS, F3SS



HD-Series Refrigerators and Freezers

The CULITEK HD-Series Refrigerators and Freezers have 304 corrosion-resistant stainless steel interior and 430 stainless steel exterior. Available in 1, 2, and 3 door models, each unit includes standard features, such as LED interior lighting, digital temperature controller, pre-installed casters, self-closing doors, and environmentally friendly, R-290 refrigerant. Advanced design, R290 Cubigel Compressors[®], minimizes operating costs and provides higher cooling capacity and increased energy savings. Backed by a 2 year warranty on parts and a 5 year warranty on the compressor, all models are EnergyStar[®] rated [R1SS, R2SS, R3SS, F1SS, F2SS, F3SS], NSF-7 certified, and ETL and ETL Sanitation listed.

Cooling System

- Environementally-friendly R290
 hydrocarbon refrigerant is free of ozonedepleting properties
- Advanced design, R290 Cubigel Compressors[®] series, minimizes operating costs and provides higher cooling capacity and energy savings
- Top down airflow helps to maintain a temperature range of 33°F to 40°F (refrigerators) and -8°F to 0°F (freezers)

Cabinet Construction

- 304 corrosion resistant stainless steel interior and 430 stainless steel exterior
- Coated coils
- Superior fit and finishing, including smooth edges

Electrical Control

- · Carel digital temperature control
- Optional Extra Shelves, includes 4 shelf clips per shelf

Door(s)

- Stainless steel exterior and interior
- Self-closing door, with stay open feature beyond 90°
- Magnetic door gasket(s) standard for positive door seal
- Recessed handles are built into the door for easy opening and closing
- Locking door keep items inside secure after hours

Shelving

- Three pre-installed shelves per section
- Shelves have preinstalled stainless steel pilasters with clips and epoxy coated wire shelves
- Shelves can hold up to 90 lbs

Model Features

- LED interior light(s)
- Pre-installed 4" casters shipped in a breakaway skid for easy unpacking and set up

EQUIPMENT THAT DOMINATES For Culinary Professionals


STANDARD FEATURES

- 304 corrosion resistant stainless steel interior and 430 stainless steel exterior
- Carel digital temperature control ranges 33°F to 40°F in refrigerators and -8°F to 0°F in freezers
- Advanced design R290 Cubigel Compressor[®] minimizes operating costs and provides higher cooling capacity and increased energy savings
- Pre-installed shelves feature stainless steel pilasters with clips and epoxy coated wire shelves
- Shelves can hold up to 90 lbs
- Self-closing door, with stay open feature beyond 90°
- Eco-friendly R290 hydrocarbon refrigerant
- Packed in a breakaway skid for easy unpacking and set up



RESIDENTIAL: Culitek assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

CULITEK C HD-Series Reach Ins Specifications

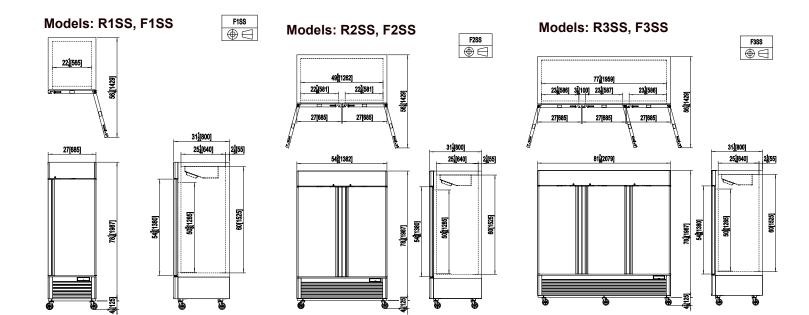

REFRIGERATORS			
Model Number	R1SS	R2SS	R3SS
Doors	1	2	3
Shelves	3	6	9
Net Volume (Cu. Ft.)	19.1	43.8	68
Overall Dimensions (in)	27"Wx31 ⁷ /10"Dx83 ¹ /10"H	54 ² /5"Wx31 ⁷ /10"Dx83 ¹ /10"H	81 ⁹ /10" x 31 ⁷ /10"D x 83 ¹ /10"H
Interior Dimensions (in)	22¹/4"Wx50⁵/8"H	227/8"W /section, 495/8"W Overall	231/8"W /section, 771/8"W Overall
Horsepower	1/7	1/5	1/5
Refrigerant	R290	R290	R290
Voltage/Hertz/Phase	115/60/1	115/60/1	115/60/1
Amps	2.1	3.2	4.2
Net Weight (Ibs)	249	397	538
Gross Weight (lbs)	282	452	615

FREEZERS			
Model Number	F1SS	F2SS	F3SS*
Doors	1	2	3
Shelves	3	6	9
Net Volume (Cu. Ft.)	19.1	44.8	68
Overall Dimensions (in)	27"W×31 ⁷ /10"D×83 ¹ /10"H	54 ² /5"W×31 ⁷ /10"D×83 ¹ /10"H	81 ⁹ /10"W×31 ⁷ /10"D×83 ¹ /10"H
Interior Dimensions (in)	22¹/4"Wx50⁵/8"H	227/8"W /section, 95/8"W Overall	231/8"W /section, 771/8"W Overall
Horsepower	1/2	3/4	1-1/4
Refrigerant	R290	R290	R290
Voltage/Hertz/Phase	115/60/1	115/60/1	115/60/1
Amps	6.3	8.6	5.5
Net Weight (lbs)	265	410	551
Gross Weight (lbs)	298	465	628

* 3 door bottom mount freezer uses a NEMA-L14-20R