



## Commercial Microwave Steamer Ovens Culitek MS022CT & MS035CT Models

### Power Output

- 2200-3500 Watts of power
- Unique method of microwave energy distribution provides superior even heating throughout the entire cavity

### On-demand steaming and batch cooking

- Fast cooking retains food quality and nutrition
- Waterless steaming—no plumbing, deliming, or ventilation required
- Ample 1.6 cubic ft. (45 liter) cavity accommodates two standard 4" (102mm) deep full size pans

### Programming flexibility

- Smart USB connectivity standard
- Stores up to 100 programmable menu items

### Easy to Use

- Controls are user friendly and require minimal training
- 11 power levels and 4 cooking stages for cooking flexibility
- Multiple quantity function automatically calculates cooking times for multiple portions
- Automatic Voltage Sensor adjusts to the power supply
- See-through door and lighted interior for monitoring without opening the door
- Stackable to save valuable counter space

### Easy to Maintain

- Stainless steel exterior and interior for easy cleaning and increased durability
- Magnetic front air filters for easy removal and cleaning
- Clean filter reminder to protect oven components.
- Constructed to withstand the foodservice environment
- Interior borosilicate tray is sealed and recessed to reduce plate-to-shelf edge impact and keep spills contained
- Removable borosilicate shelf is easy to clean

### This microwave oven is ideal for...

#### Applications

- Schools
- Healthcare facilities
- Buffets
- Cafeterias
- Stadiums
- Casual and fine dining
- Seafood restaurants
- Country clubs
- Quick service restaurants
- Supermarkets

#### Through put potential by oven wattage (items per hour)

Food item	2200W	3500W
Baby Red Potatoes (10lbs (4.5kg))	3	5
Frozen Vegetables (8lbs (3.5kg))	4	6
Lobster Tails (6 tails)	30	40
Poached Cod (8 filets)	8	10
Shrimp (2lbs (1kg))	18	24

### Service

All products are backed by Culitek  
Commercial Service

**CULITEK**  
Commercial Service  
800-436-9472

### Warranty


Warranty Certificate for this product can be found on  
the Culitek. website at [culitekequipment.com](http://culitekequipment.com)

### Safety and Sanitation

This product meets and exceeds safety and sanitation  
standards set for commercial microwave ovens by UL, ETL, NSF,  
CSA, and FDA



# Culitek MS022CT & MS035CT Models | Commercial Microwave Steamer Ovens

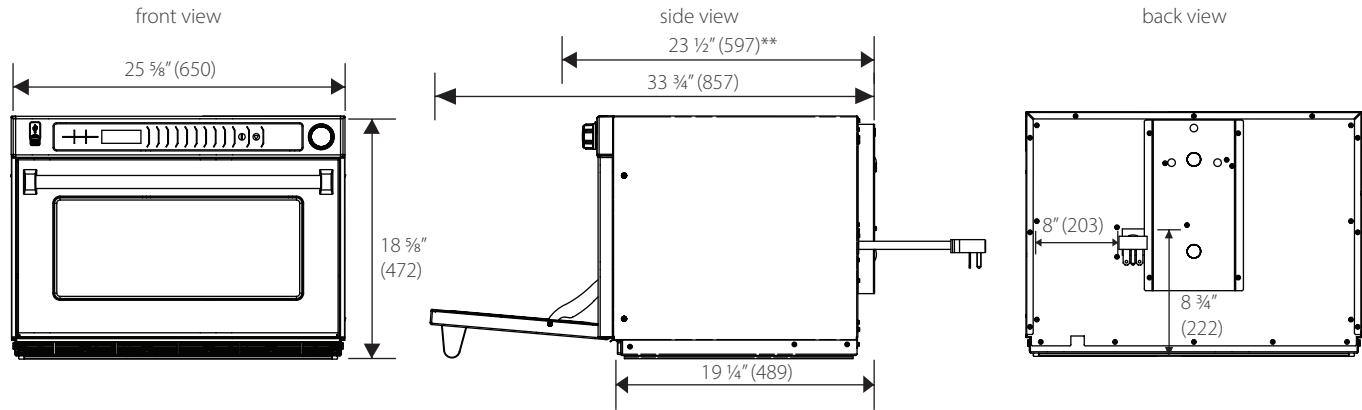

## Dimensions

<b>Exterior</b>	H 18 5/8" (472)	W 25 5/8" (650)	D† 23 1/2" (597)
<b>Cavity</b>	H 9 7/8" (251)	W 21" (535)	D 13" (330)
<b>Usable Cavity Space</b>	1.6 cubic ft. (45 liter)		
<b>Door Depth</b>	33 3/4" (857), drop down door		
<b>Installation Clearance</b>	Top: 7" (178)	Sides: 1" (25)	Back: None
<b>Shipping Carton</b>	H 22 1/4" (565)	W 30 1/4" (768)	D 26 1/4" (667)

## Weight

Product Weight	Ship weight (approx.)	UPS Shippable
146 lb. (66 kg)	161 lbs. (73 kg)	No

Measurements are US Standard. Measurements in ( ) are in millimeters

\* IEC 60705 Tested

† Includes handle

## Features

<b>Configuration</b>	Countertop
<b>Stackable</b>	Yes
<b>Display</b>	LCD
<b>USB Port</b>	Yes
<b>Control System</b>	Touchpad w/ dial
<b>Programmable Control</b>	Yes, 10 pads
<b>Braille</b>	No
<b>Settings Programmable</b>	100, with optional A/B menu
<b>Max. Cooking Time</b>	60:00
<b>Microwave Distribution</b>	Top and bottom antennas
<b>Power Levels</b>	11
<b>Defrost</b>	Yes, power level 2
<b>Time Entry Option</b>	Yes
<b>Dial Time Entry</b>	Yes
<b>Multiple Portion Setting</b>	Yes, X2
<b>Stage Cooking</b>	4 stages
<b>Interior Light</b>	Yes, LED
<b>Automatic Voltage Sensor</b>	Yes
<b>Air Filter</b>	Yes, 2 removable with cleaning reminder
<b>Signal</b>	End of cycle, adjustable
<b>Door Opening</b>	Pull down
<b>Door Construction</b>	Glass Window
<b>Latch Number</b>	2
<b>Exterior Finish</b>	Stainless steel
<b>Interior Finish</b>	Stainless steel with recessed borosilicate tray
<b>Interior Shelf</b>	1 shelf position; 1 removable borosilicate shelf

## Electrical Configuration

Model#/UPC	Power Consumption	Power Output (microwave)	Power Source	Plug Configuration	Cord Length	Frequency	Magnetron
<b>MS022CT</b> 810081733755	3500 W	2200W*	208/240V, 60Hz, 20A, single phase	NEMA 6-20P	5 ft. (1.5m)	2450MHz	4
<b>MS035CT</b> 810081733779	5100 W	3500W*	208/240V, 60Hz, 30A, single phase	NEMA 6-30P	5 ft. (1.5m)	2450MHz	4

Updated 8/31/2021