

It all starts with the ingredients.

We understand the importance of having reliable equipment in your operation. Our job is to provide equipment that puts your mind at ease so you can do what you do best, create!



CULITEK C REFRIGERATION

CULITEK, Commercial Foodservice Equipment You Can Count On!

Undercounter Refrigerators & Freezers

Buying Guide



EQUIPMENT THAT DOMINATES



430 Stainless Steel **Exterior Construction**



Environmentally Friendly R290 Hydrocarbon Refrigerant







	3 K I	

INTERIOR	CONSTRI	LICTION
	V.() V. () I V.	

SHELF INSTALLATION

SHELF CAPACITY

TEMPERATURE RANGE

SELF-CLOSING DOORS

AIR FLOW

AVAILABLE MODELS

Corrosion-Resistant 304 Stainless Steel

Adjustable plastic coated steel shelves installed with K-clips

Up to 90 lbs.

Digital temperature control ranges 33°F to 41°F

Positive self-closing doors—micro-switch shuts the evaporator fans off when the door is open and recessed handles

Rugged built axial evaporator fans run efficiently with low velocity and high volume air flow

1, 2, and 3 Door Undercounters MRUCRF-27, MRUCRF-48, MRUCRF-60, MRUCRF-72, MRUCFZ-27, MRUCFZ-48

HD Series

Corrosion-Resistant 304 Stainless Steel

Shelves have preinstalled stainless steel pilasters with clips and epoxy coated wire shelves

Up to 90 lbs.

Digital temperature control ranges 33°F to 40°F

With stay open feature beyond 90°

Air flow channeled down the back of the unit for better airflow distribution in the cabinet

1, 2, and 3 Door Undercounters UR27, UR48, UR60, UR72, UF27, UF48













Equipment That Dominates

REFRIGERATION





Undercounters

CULITEK undercounter refrigerators and freezers are constructed of heavy-duty, stainless steel, these units fit under your countertop. The flat stainless steel countertop allows for them to be used as a separate workstation. Features include LED lighting, casters, self-closing door with stay open feature, digital control and R290 refrigerant. All models are ETL and ETL Sanitation listed, and are backed with a 2 year warranty on parts and a 5 year warranty on the compressor.

CULITEK UNDERCOUNTER MODELS

SS-SERIES: MRUCRF-27, MRUCRF-48, MRUCRF-60, MRUCRF-72, MRUCFZ-27, MRUCFZ-48 HD SERIES: UR27, UR48, UR60, UR72, UF27, UF48





CULITEK Refrigerator Comparison





MRUCRF-27 1 1 6.3 cu ft 1/6 R290 33°F - 40°F



1

1
7.2 cu ft
1/7
27.5"Wx30"Dx34"H
R290
33°F - 40°F



MRUCRF-48
2
2
12 cu ft
1/5
47.25"Wx29.5"Dx35.2"H
R290
33°F - 40°F



UR48
2
2
13.4 cu ft
1/7
48"x30"Dx34"H
R290
33°F - 40°F





-		_
	T	

UR72

3

3

1/5

CULITEK Freezer Comparison



Doors	1
Shelves	1
Capacity	6.3 cu ft
Horsepower	1/5
Overall Dimensions	27"Wx29.5"Dx35.2"H
Refrigerant	R290
Temperature Range	-7°F - 0°F



UF27
1
1
7.2 cu ft
1/5
27.5"Wx30"Dx34"H
R290
-8°F - 0°F



· ·	
MRUCFZ-48	UF48
2	2
2	2
12 cu ft	13.4 cu ft
1/4	1/4
47.25"W x 29.5"D x 35.2"H	48"Wx30"Dx34"
R290	R290
-7°F -0°F	-8°F - 0°F



1/4	
V x 29.5"D x 35.2"H	60"
R290	
33°F - 40°F	3

R290		
33°F - 40°F		



		4-	
	UF48		
	2		
	2		
13	3.4 cu	ft	
	1/4		
48"W	x30"Dx	(34"H	



CULITEK Undercounter Refrigerators & Freezers

Models: MRUCRF-27, MRUCRF-48, MRUCRF-60, MRUCRF-72 MRUCFZ-27, MRUCFZ-48

EQUIPMENT THAT DOMINATES For Culinary Professionals





Undercounter Refrigerators and Freezers

Keep foods cold and easily accessible with these compact undercounter refrigerators from CULITEK. Constructed of heavy-duty, stainless steel, these units fit under your countertop making them the perfect solution to adding more space anywhere you need. The flat stainless steel countertop allows for them to be used as a separate workstation. All undercounter units come with 4" casters and plastic coated wire shelving. Models are ETL Listed and ETL Sanitation, and are backed with a 2 year warranty on parts and a 5 year warranty on the compressor.

Cooling System

- R290 hydrocarbon refrigerant is an environmentally-responsible choice for your business.
- · Maintains a temperature range of 33°F to 41°F (refrigerators) and -8°F to 0°F (freezers)
- · Rugged built axial evaporator fans run efficiently with low velocity and high volume air flow

Cabinet Construction

- · Exterior is constructed of 430 corrosionresistant stainless steel, including doors
- · Interior is constructed of 304 corrosionresistant stainless steel
- · Insulated cabinet with foamed-in-place, high density cell polyurethane insulation

Electrical Control

- · LED temperature display provides easy temperature adjustment when necessary
- · Carel temperature controller initiates automatic defrost cycle for worry-free use
- 7-foot power cord with NEMA 5-15 plug

Door(s)

- · Stainless steel exterior
- · Positive self-closing doors with microswitch that shuts the evaporator fans off when the door is open
- · Recessed handles are built into the door for easy opening and closing
- · Removable door gasket for easy cleaning

Shelving

- · Adjustable plastic coated steel shelves have a load capacity of 90 lbs. per shelf
- · Shelving installed with K-clips

Model Features

- 4" casters come standard on all stainless steel models, 2 locking wheels and 2 non-locking wheels
- · Stainless steel top is 2" thick

STANDARD FEATURES

- Easy to clean, 430 series stainless steel exterior
- Interior constructed of 304 stainless steel
- Digital temperature control ranges 33°F to 41°F in refrigerators and -8°F to 0°F in freezers
- **Epoxy coated, corrosion** resistant shelves with 90 lb. capacity per shelf
- Self-closing door, with microswitch that shuts the evaporator fans off when door is open
- Preprogrammed digital control featuring auto-defrost cycle
- Foamed-in-place insulation helps provide strength, while helping to maintain internal temperature
- **Eco-friendly R290 hydrocarbon** refrigerant
- All models come with 4" casters







Attention CA Residents **PROP 65 WARNING**

This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm.

For more information, go to www.P65warnings.ca.gov


MADE IN CHINA




MRUCRF-27, MRUCFZ-27

35.25"

27"




























UNDERCOUNTER REFRIGERATORS				
Model Number	MRUCRF-27	MRUCRF-48	MRUCRF-60	MRUCRF-72
Doors	1	2	2	3
Shelves	1	2	2	3
Net Volume (Cu. Ft.)	6.3	12	17	21
Overall Dimensions (in)	27"W x 29.5"D x 35.25"H	47.25"Wx29.5"Dx35.25"H	60"W x 29.5"D x 35.25"H	71.5"W x 29.5"D x 35.25"H
Interior Dimensions (in)	22"W x 23"D x 23.5"H	42.5"W x 23"D x 23.5"H	55.5"W x 23"D x 23.5"H	67"W x 23"D x 23.5"H
Horsepower	1/6	1/5	1/5	1/5
Refrigerant	R290	R290	R290	R290
Voltage/Hertz/Phase	115/60/1	115/60/1	115/60/1	115/60/1
Amps	1.9	2.7	2.9	3.2
Net Weight (lbs)	169	238	282	364
Gross Weight (lbs)	220	299	326	408
Shipping Dimensions (in)	29.7"W x 32.5"D x 38.5"H	50"W x 32.5"D x 38.5"H	63"W x 32.5"D x 38.5"H	50"W x 32.5"D x 38.5"H

UNDERCOUNTER FREEZERS				
Model Number	MRUCFZ-27	MRUCFZ-48		
Doors	1	2	-	-
Shelves	1	2	-	-
Net Volume (Cu. Ft.)	6.3	12	-	-
Overall Dimensions (in)	27"W x 29.5"D x 35.25"H	47.25"Wx29.5"Dx35.25"H	-	-
Interior Dimensions (in)	22"W x 23"D x 23.5"H	42.5"W x 23"D x 23.5"H	-	-
Horsepower	1/5	1/4	-	-
Refrigerant	R290	R290	-	-
Voltage/Hertz/Phase	115/60/1	115/60/1	-	-
Amps	2.1	3.12	-	-
Net Weight (lbs)	178	251	-	-
Gross Weight (lbs)	233	312	-	-
Shipping Dimensions (in)	29.7"W x 32.5"D x 38.5"H	50"W x 32.5"D x 38.5"H	-	-



Models: UR27, UR48, UR60, UR72

UF27, UF48

EQUIPMENT THAT DOMINATESFor Culinary Professionals



HD-Series Undercounter Refrigerators and Freezers

Keep foods cold, and easily accessible with these compact undercounter refrigerators and freezers from CULITEK. Constructed of heavy-duty, stainless steel, these units fit under your countertop making them the perfect solution to adding more space anywhere you need. The flat stainless steel countertop allows for them to be used as a separate workstation. All undercounter units come with 5" casters and plastic coated wire shelving. Backed by a 2 year warranty on parts and a 5 year warranty on the compressor, all models are EnergyStar® rated [UR27, UR48, UR60, UR72, UF27, UF48] and ETL and ETL Sanitation listed.

Cooling System

 R290 hydrocarbon refrigerant maintains a temperature range of 33°F to 40°F (refrigerators) and -8°F to 0°F (freezers)

Cabinet Construction

- 304 corrosion resistant stainless steel interior and 430 stainless steel exterior
- Coated coils
- Superior fit and finishing, including smooth edges

Electrical Control

 Carrel digital controller. Electric LED temperature controller provides a digital display of cabinet temperatures, allowing for easy temperature adjustments when necessary

Door(s)

- · Stainless steel exterior and interior
- Self-closing door, with stay open feature beyond 90°
- Magnetic door gasket(s) standard for positive door seal
- · Standard vertical handle

Shelving

- One (1) pre-installed shelf per section
- Shelves have pre-installed stainless steel pilasters with clips and epoxy coated wire shelves
- Shelves can hold up to 90 lbs

Model Features

- LED interior light(s)
- Pre-installed 5" casters shipped in a breakaway skid for easy unpacking and set up

STANDARD FEATURES

- 304 corrosion resistant stainless steel interior and 430 stainless steel exterior, with reinforced stainless steel top
- Carel digital temperature control ranges 33°F to 40°F in refrigerators and -8°F to 0°F in freezers
- Self-closing door, with stay open feature beyond 90°
- Pre-installed shelves feature stainless steel pilasters with clips and epoxy coated wire shelves
- Shelves can hold up to 90 lbs
- · Pre-installed 5" casters
- · Carel digital controller
- Eco-friendly R290 hydrocarbon refrigerant
- Pre-installed casters with a break-away skid









[UR27, UR48, UR60, UR72, UF27, UF48]








Attention CA Residents PROP 65 WARNING

This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.P65warnings.ca.gov

MADE IN CHINA

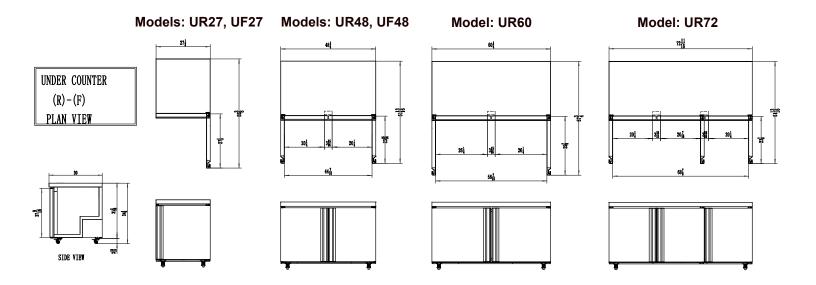

UNDERCOUNTER R Model Number	EFRIGERATORS UR27	UR48	UR60	UR72
Doors	1	2	2	3
Shelves	1	2	2	3
Net Volume (Cu. Ft.)	7.2	13.4	17.2	21.1
Overall Dimensions (in)	27 ¹ / ₂ "W×30"D×34 ¹ / ₅ "H	48 ³ / ₁₀ "W×30"D×34 ¹ / ₅ "H	60 ¹ / ₅ "W×30"D×34 ¹ / ₅ "H	72 ⁷ / ₁₀ "W×30"D×34 ¹ / ₅ "H
Horsepower	1/7	1/7	1/5	1/5
Refrigerant	R290	R290	R290	R290
Voltage/Hertz/Phase	115/60/1	115/60/1	115/60/1	115/60/1
Amps	2.3	2.3	2.8	2.8
Net Weight (lbs)	159	231	271	317
Gross Weight (lbs)	137	192	218	254

UNDERCOUNTER FREEZERS					
Model Number	UF27	UF48			
Doors	1	2			
Shelves	1	2			
Net Volume (Cu. Ft.)	7.2	13.4			
Overall Dimensions (in)	27 ¹ / ₂ "W×30"D×34 ¹ / ₅ "H	48 ³ / ₁₀ "W×30"D×34 ¹ / ₅ "H			
Horsepower	1/7	1/7			
Refrigerant	R290	R290			
Voltage/Hertz/Phase	115/60/1	115/60/1			
Amps	2.3	2.3			
Net Weight (lbs)	159	231			
Gross Weight (lbs)	137	192			